


21.8" (SPA Mount)

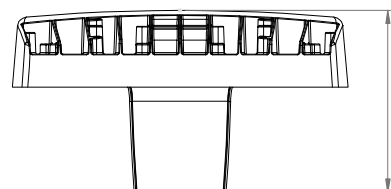

3.0" Main Body
7.2" Arm

LUMINAIRE REQUIREMENTS:

1. OPTICS: SHORT AND WIDE PATTERN DISTRIBUTIONS INCLUDING TYPE 2, 3, 3S, 4, 4S, 5, 5S, AFR (AUTOMOTIVE FRONT ROW), AND AFR ROTATED AFRR90 AND AFRL90.
2. LUMENS: 7,000 TO 17,000 AVAILABLE.
3. ELECTRICAL: 120-480V, MVOLT, HVOLT, XVOLT. 3000K, 4000K, 5000K; 70 CRI. 10kV SURGE PROTECTION WITH 20kV OPTION. L92 AT 100,000 HOURS.
4. MOUNTING: SQUARE AND ROUND MOUNTING, MAST ARM ADAPTER, ADJUSTABLE SLIPFITTER, WALL BRACKET, AND ADJUSTABLE TILT ARM.
5. CONTROLS: PHOTOCONTROL, 0-10V DIMMING, NLIGHT AIR SENSOR.
6. EMERGENCY: BATTERY BACKUP.
7. LISTINGS: WET LOCATION.
8. WARRANTY: 5-YEAR LIMITED WARRANTY.

DETAIL BASED ON LITHONIA LIGHTING "RSX1" SERIES

TYPE	LUMENS	LAMP TYPE	INPUT WATTS	VOLTAGE	MOUNTING

LED AREA LUMINAIRE